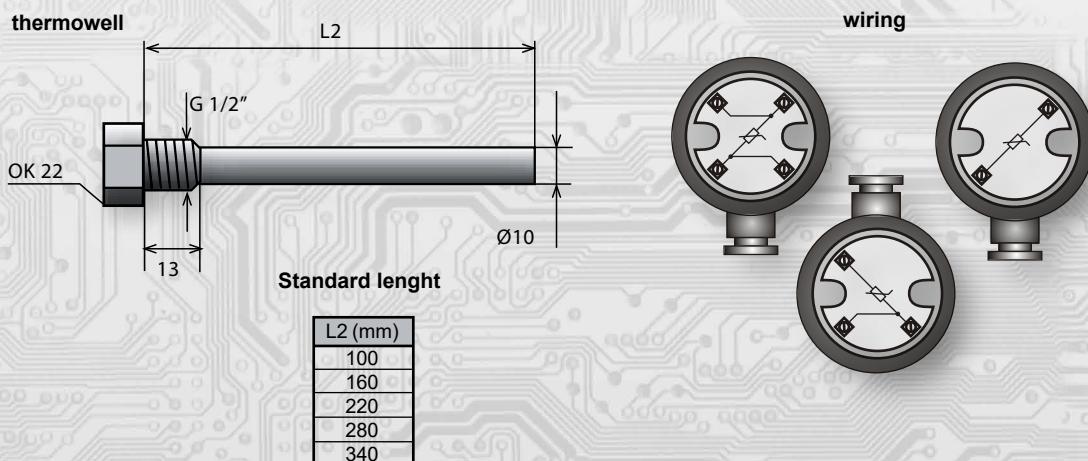

Technical parameters:

Measuring range	-30 ÷ 250 °C (Pt100, Pt500, Pt1000) -30 ÷ 200 °C (Ni1000, Ni10000, Ni891, Ni2226) -30 ÷ 150 °C (NTC 20kΩ)
Sensing element	see the table below
Connection	2 (on request 3 or 4) wiring
Accuracy	class B, IEC 751 (Pt100, Pt 500, Pt1000) class B, DIN 43760 (Ni1000, Ni10000, Ni891, Ni2226) ± 1 °C (NTC20kΩ)
Head	material aluminium, color grey
Stem	stainless steel, DIN 1.4301, Ø = 6 mm, length of stem L1: see the table below
Insulation resistance	> 100 MΩ at 25 °C (500 V DC)
Protection type	IP 65 (EN 60529)
Relative humidity	< 95 %
Terminal board	ceramic, type KLM
Cable gland	PG9, wire diameter 4 ÷ 8 mm
Versions	A13x - L1 (one sensing element) 2A13x - L1 (two sensing elements) x = P, PA, PB, S, L, J, SA, H or N

2 (mm) - length of the thermowell


Summary

Sensor	A13P	A13PA	A13PB	A13S	A13L	A13J	A13SA	A13H	A13N
Sensing element	Pt100	Pt1000	Pt500	Ni1000/6180	Ni1000/5000	Ni891	Ni10000/6180	NTC 20kΩ	Ni2226
Recommended measurement current	1 mA	0,1 mA	0,7 mA	0,1 mA	0,1 mA	0,1 mA	0,01 mA	*	0,1 mA
Max. measurement current	5mA	1 mA	3 mA	1 mA	1 mA	1 mA	0,5 mA	*	0,7 mA

On the request sensors can be supplied with two measuring elements or sensors with other types of measuring elements such as NTC, PTC, KTY etc